

PIR Specification

69338, 69340, 69342 and 69344 are fitted with a fixed PIR motion sensor. The specification is as follows:-

Optimum mounting height: 1.8-2.5m

Time Delay: 90 seconds \pm 15 seconds

Detection angle: 90°

Detection distance: 7m

Fitting/replacing bulbs

- This system contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.

We recommend cleaning with a soft dry cloth.

Do not use solvents or abrasive cleaners as these could damage the finish.

Recycling advice



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

Safety information

For your safety, always switch off the supply before cleaning.

Instruction leaflet

Sabre Wall Light

69337, 69338, 69339, 69340, 69341, 69342, 69343, 69344, 69345



CE

saxby
lighting

Iss3 16022017

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

This is a Class 1 product and must be earthed.

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a circuit with a 30mA RCD fitted.

If replacing an existing fitting, make a careful note of the connections.

The unit cannot be dimmed.

This system contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

This product is rated at IP65 if it doesn't have a PIR. It is rated at IP44 if it is fitted with a PIR.

This product is not suitable for location in or near a marine environment.

The entire unit gets hot whilst on for a period of time.

Terminal block not included. Installation may require advice from a qualified person.

Specification

Voltage:	240V ~ 50Hz
Lamp:	69337: 10W LED Module - 800lm 69338: 10W LED Module - 800lm 69339: 20W LED Module - 1600lm 69340: 20W LED Module - 1600lm 69341: 30W LED Module - 2400lm 69342: 30W LED Module - 2400lm 69343: 50W LED Module - 4000lm 69344: 50W LED Module - 4000lm 69345: 80W LED Module - 6400lm
IP rating:	IP65 for items without a PIR sensor, IP44 for items with a PIR sensor.

Layout

- Plan the desired layout of this fitting carefully, ensuring the cables will reach the distance between the junction box and the light fitting.
- Avoid locating any cables in positions that would cause a hazard. Position cables and outdoor rated junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged.
- This product is supplied with 1.5 metres of H05RN-F outdoor grade rubber sheathed cable - ready for connection to an approved, outdoor rated terminal block which is not supplied and must be obtained.
- Cables must be protected using suitable conduit or plastic trunking.
- This is a floodlight product, and therefore should be positioned where it will not cause a glare hazard.

Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, **carefully note the position of each set of wires.**


- Decide on the optimum location for the product.
- Hold the product in position and mark the location of the fixing holes. A minimum of two fixing points must be used. Ensure the wall is capable of holding

the weight of the product. The bracket can be removed from the fitting for ease of installation

- Drill and plug the wall at the marked positions.
- Fix the bracket to the wall using the screws provided and plugs. Take care to avoid damaging any concealed wiring and pipes. The correct fixings should be used for brick or cavity walls.
- Wire as detailed below.

Wiring

Terminal block not included. Installation may require advice from a qualified person. Connect to an approved outdoor rated terminal block, observing the wiring diagram here:-

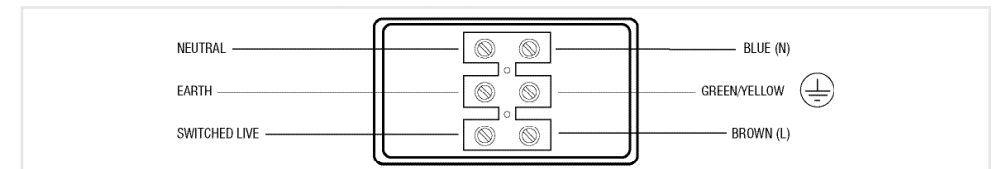

Check that...

- You have correctly identified the wires.
- The connections are tight.
- No loose strands have been left out of the connection block.

Commissioning

- Refit the cover on the IP terminal block. Ensure that the seals are correctly located, and refit the screws.
- Loosen the bolts on the side, and adjust the fitting to the desired position. Ensure that the cable is not snagged. Re-tighten the bolts.
- Replace fuse or circuit breaker and switch on. Your light is now ready for use.