



STIRLING LAYERED GLASS WALL LIGHT INSTALLATION INSTRUCTIONS

These instructions are provided for your safety.
Please read them carefully before commencing work and retain them for future reference.

SAFETY INFORMATION


- * If you are in any doubt consult a person competent to give advice on the installation of electrical equipment.
- * This fitting should be fitted in accordance with IEE Wiring Regulations and the Building Regulations
- * To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electricity supply without your knowledge.
- * To avoid damage to concealed wiring during installation, establish the direction of the supply cable before drilling fixing holes.
- * This fitting is Class 2 =  therefore no earth is required and should be fitted to a lighting supply protected by a 5 amp fuse or equivalent circuit breaker.
- * Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Never exceed the wattage stated.
- * When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.
- * This fitting is designed for use with self-shielded tungsten halogen lamps only = 


INSTALLATION

1. Ensure the house electricity supply is off at the fuse board.
2. If you are fitting this unit in place of an existing wall light, you may find that there are more than 3 sets of cables connected. Before removing the existing fitting, carefully note the position of each set of cables. If there are loop in cables that are not connected to the light these must be terminated in a separate terminal block not connected to the fitting.
3. Remove the mounting bracket from the fitting by removing the 2 screws, retain these screws.
4. Using the mounting bracket as a template, mark and drill the fixing holes. Fix mounting bracket to the wall using suitable screws, ensuring that they are firmly fixed to the wall or other suitable mounting. ①
5. The weight of the fitting must be supported whilst you make the electrical connections. ②
Connect the supply live (normally brown or red) to fitting live (marked "L") on the terminal block.
Connect the supply neutral (normally blue or black) to fitting neutral (marked "N") on the terminal block.

Please note: No earth should be connected to any part of this fitting. If an earth is present please tape over it using a good quality insulation tape.

NOTE: Ensure electrical connections are tight and no loose strands of wire are left out of the terminal block.

6. Fit any excess cable into wall void. **Take care not to damage wiring.**
7. Fit the light fitting onto the mounting bracket and secure with the 2 screws removed earlier. ③
8. Fit the bulb, type and wattage as indicated on the fitting. **The wattage indicated must not be exceeded.** Use only self shielded bulbs  Do not touch halogen bulbs with bare hands as this will shorten their lives.
9. Assemble the glass as shown and secure with ring, tighten the ring with the tool provided taking care not to overtighten.
10. Switch on the electricity supply at the fuse board.

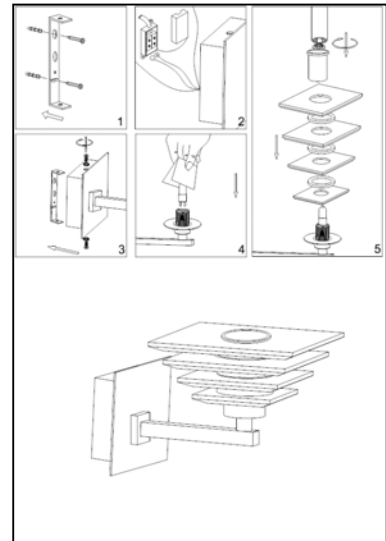

GENERAL INFORMATION

This fitting is designed for internal use only and must be fitted to a DRY SURFACE as any dampness in plaster or paint can damage the finish. **Do not use polish or abrasive cleaner - just a soft dry cloth.**