

Commissioning

- After connecting the supply cable to the terminal block, replace the fascia using the 4 screws removed earlier.
- Insert the light into the housing until the spring clips lock into place. Ensure the shade is pointing downwards to avoid staring directly into the LEDs.
- Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Fitting/replacing bulbs

- The LED bulbs in this product are non replaceable

We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish.


Recycling advice



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

Safety information

Live Voltages may be present in this unit even when turned off or when completely disconnected. For your safety, always switch off the supply before changing lightbulbs, or cleaning.



The LED module is protected by a shade. The shade cannot be replaced, if the shade becomes cracked or damaged, this fitting must be discarded.

Instruction leaflet

Varone Recessed Bricklight

55702



saxby
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

This is a Class 1 product and must be earthed.

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a circuit with a 30mA RCD fitted.

If replacing an existing fitting, make a careful note of the connections.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

This light fitting contains non-replaceable parts and cannot be serviced.

If damage occurs the part should be discarded. This product is rated at IP65.

This product is not suitable for location in or near a marine environment.

This product is not suitable for dimming.

Specification

Voltage: 240V 50Hz a.c.
Lamp: 4W LED module, 50lm
IP rating: 65

Layout

- Plan the desired layout of this fitting carefully, ensuring the cables will reach the distance between the junction box and the light fitting.
- Avoid locating any cables in positions that would cause a hazard. Position cables and outdoor rated junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged.
- We recommend that you use H05RN-F specification cable (not supplied) which is an outdoor grade, rubber sheathed cable. The mains supply cable must have a minimum cross sectional area of 1.0mm²
- Cables must be protected using suitable conduit or plastic trunking.


Installation

Existing fittings must be completely removed before installation of a new product. **Before removing the existing fitting, carefully note the position of each set of wires.**

- The product comes with a housing unit that must be fitted into the hole prior to any wiring taking place.
- Cut the mounting hole for the unit taking care not to damage any pipes or mains cables beneath the mounting surface.
- 95mm x 95mm cutout, 65mm void depth

Knock out a suitable cable entry hole and pull the supply cable through.


- Fit the housing into position and secure. This surround may be cemented in position. Wait until the cement has set before continuing with the installation.
- Unscrew the 4 screws around the fascia to access the terminal block. Feed the supply cable through the metal gland and connect as below.

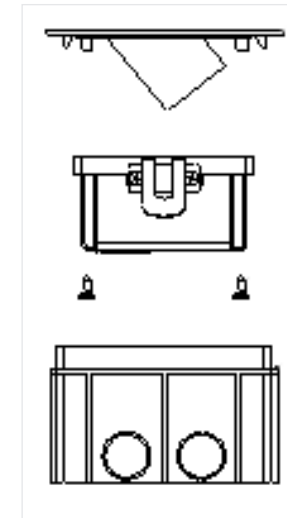

Wiring

Having correctly identified the wiring from your existing light fitting, pull the wire through the hole and connect to

the connection block inside the product in the following way:

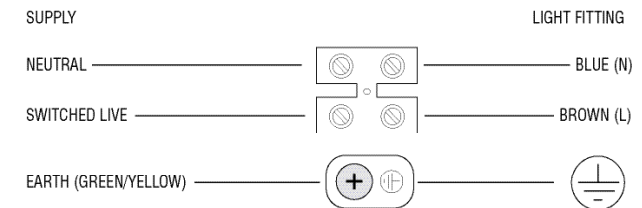

Check that...

- You have correctly identified the wires
- The connections are tight
- No loose strands have been left out of the connection block.