

KATIE DOUBLE WALL BRACKET INSTALLATION INSTRUCTIONS

These instructions are provided for your safety.

Please read carefully before commencing work and retain for future reference.

SAFETY INFORMATION

- * If you are in any doubt consult a person competent to give advice on the installation of electrical equipment.
- * This fitting should be fitted in accordance with current IEE Wiring Regulations and Building Regulations.
- * To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electricity supply without your knowledge.
- * To avoid damage to concealed wiring during installation, establish the direction of the supply cable before drilling fixing holes.
- * This fitting is Class 2 = therefore no earth is required and should be fitted to a lighting supply protected by a 5 amp fuse or equivalent circuit breaker.
- * Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Never exceed the wattage stated.
- * When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.

INSTALLATION

1. Ensure the house electricity supply is off at the fuse board.
2. If you are fitting this product in place of an existing one, you may find that there are more than 3 sets of cables connected. If there are loop in cables that are not connected to the light these must be terminated in a separate terminal block not connected to the fitting. Before removing existing fitting, carefully note position of each set of cables
3. Remove the bottom cup from the fitting by undoing the finial ball at the bottom. This gives you access to the wiring and mounting holes.
4. Using the fitting as a template, mark and drill fixing holes in the wall. Ensure the holes are drilled into a solid wall or other suitable mounting and not just into plaster.
5. Align the fitting with the fixing holes. Pass the supply cable through the cut-out and fit to the wall using suitable fixings.
6. Open connector using a screwdriver to lever open the casing. Feed the supply cable through the rubber sleeving:


Note. Ensure that any basic insulation on the supply cable is covered by the rubber sleeve.

Connect supply live (normally brown or red) to fitting live (marked "L") on the terminal block.

Connect supply neutral (normally blue or black) to fitting neutral (marked "N") on the terminal block.

Please note: No earth should be connected to any part of this fitting. If an earth is present please tape over it using a good quality insulation tape.

Snap connector cover closed ensuring that the connections are sound and no loose strands of wire are exposed.
7. Secure the bottom cup back onto the fitting. Position the cup onto the thread and secure in place using the finial removed earlier. **Take care not to damage wiring.**
8. Remove the packaging from all the sconces and droppers that are packed separately. Attach them to the fitting as shown in the drawing.
9. Fit the bulbs: Type and wattage as indicated on the fitting. **The wattage indicated must not be exceeded.**
10. Switch on the electricity supply at the fuse board.

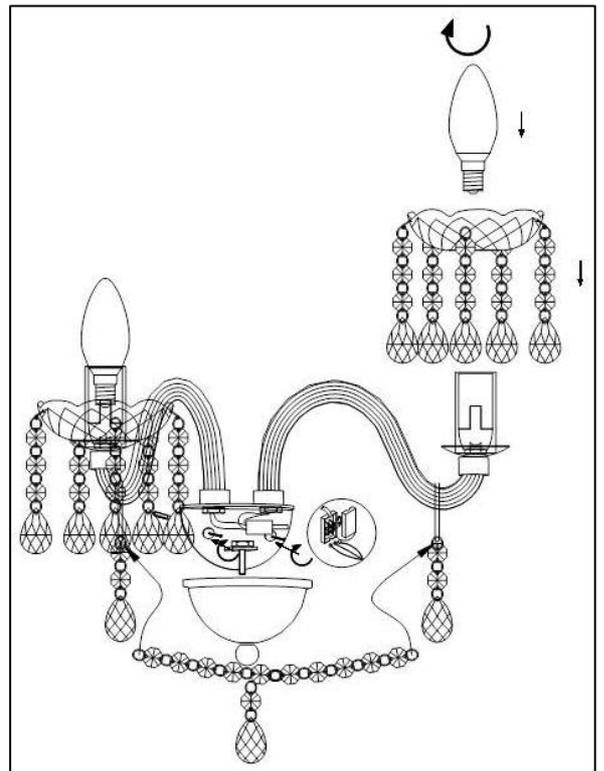

GENERAL INFORMATION

This fitting is designed for internal use only and must be fitted to a DRY SURFACE as any dampness in plaster or paint can damage the finish. **Do not use polish or abrasive cleaner - just a soft dry cloth.**