

KATIE PENDANT INSTALLATION INSTRUCTIONS

These instructions are provided for your safety.

Please read carefully before commencing work and retain for future reference.

SAFETY INFORMATION


- * If you are in any doubt consult a person competent to give advice on the installation of electrical equipment.
- * This fitting should be fitted in accordance with IEE Wiring Regulations and the Building Regulations
- * To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electricity supply without your knowledge.
- * To avoid damage to concealed wiring during installation, establish the direction of the supply cable before drilling fixing holes.
- * This fitting is Class 2 = therefore no earth is required and should be fitted to a lighting supply protected by a 5 amp fuse or equivalent circuit breaker.
- * Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Never exceed the wattage stated.
- * When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.

INSTALLATION


1. Screw the stem of the light into the main body and secure the stem with the grub screw using the Allen key provided.
Note: the chain must support the weight of this fitting not the supply cable.
Chain links may be adjusted at this stage to reduce height of chandelier, use 2 pliers to open chain links, remove links as required then close links. (Cloth should be used between jaws of the pliers to protect decorative finish) Pull excess cable through into the ceiling cup.
2. Before removing existing rose from the ceiling, carefully note the position of each set of cables. If there are loop in cables that are not connected to the light these must be terminated in a separate terminal block not connected to the fitting.
3. Using the mounting bracket as a template, mark and then drill fixing holes into the ceiling. Take care to avoid damaging any concealed wiring.
4. Attach the mounting bracket onto the ceiling using suitable fixings. Ensure the screws are firmly fixed into a joist or other suitable mounting and not just the plasterboard.
5. The weight of fitting must be supported whilst you make the electrical connections as follows. Ensure that the supply cable is fed through the rubber sleeve so that there is no basic insulation visible.
Connect supply live (normally brown or red) to fitting live (marked "L") on the terminal block.
Connect supply neutral (normally blue or black) to fitting neutral (marked "N") on the terminal block.
Please note: No earth should be connected to any part of this fitting. If any earth wires are present they need to be terminated into a separate terminal block (not supplied) to ensure that the earth continuity is maintained throughout the house.
Snap the connector cover closed ensuring that the connections are sound and no loose strands of wire are exposed.
6. Attach the fitting onto the mounting bracket with the hook. Slide the ceiling cup into place and secure using screw located at the side.
7. Move all of the arms into a symmetrical position that you are happy with. **Take care to move the arms carefully as they are not meant to be moved up or down, only rotate them into position.**
8. Remove all packaging material that is surrounding the droppers chains and sconces that have been packed separately. Identify all parts as per the drawing attached and secure to the fitting as shown.
9. Fit the bulbs, type and wattage as indicated on the fitting. **The wattage indicated must not be exceeded.**

GENERAL INFORMATION


This fitting is designed for internal use only and must be fitted to a DRY SURFACE as any dampness in plaster or paint can damage the finish. **Do not use polish or abrasive cleaner - just a soft dry cloth.**

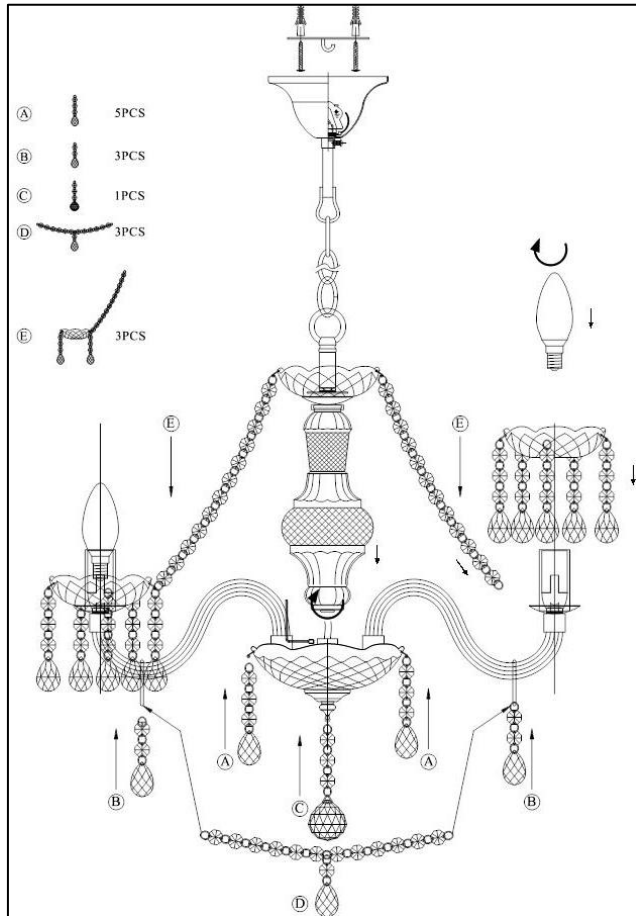


KATIE 3 LIGHT

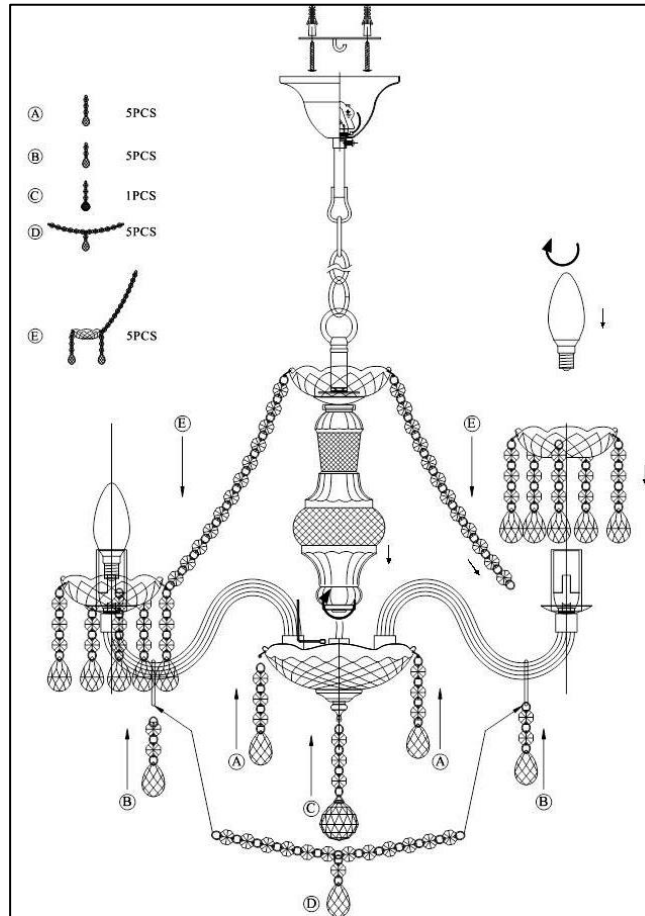

KATIE 5 LIGHT

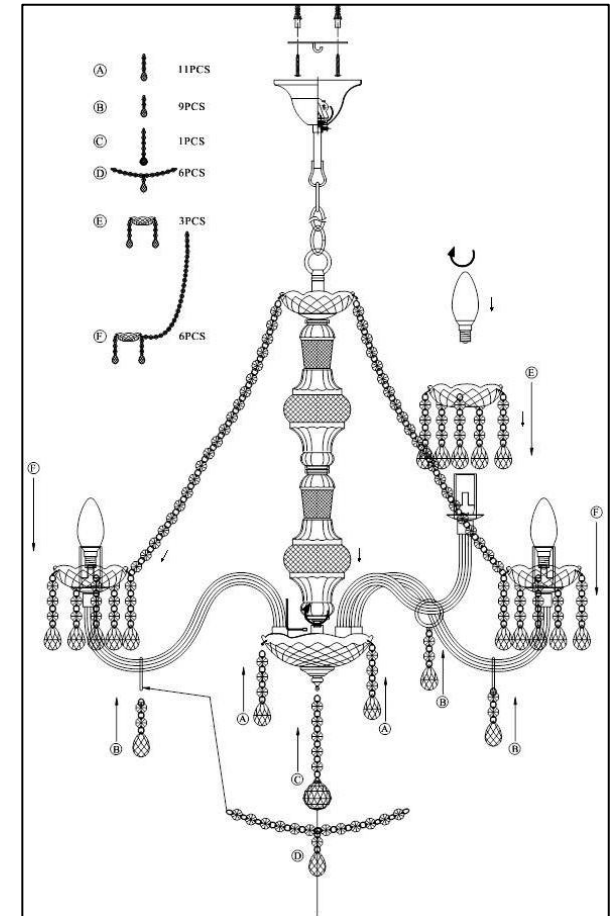

KATIE 9 LIGHT VERSION

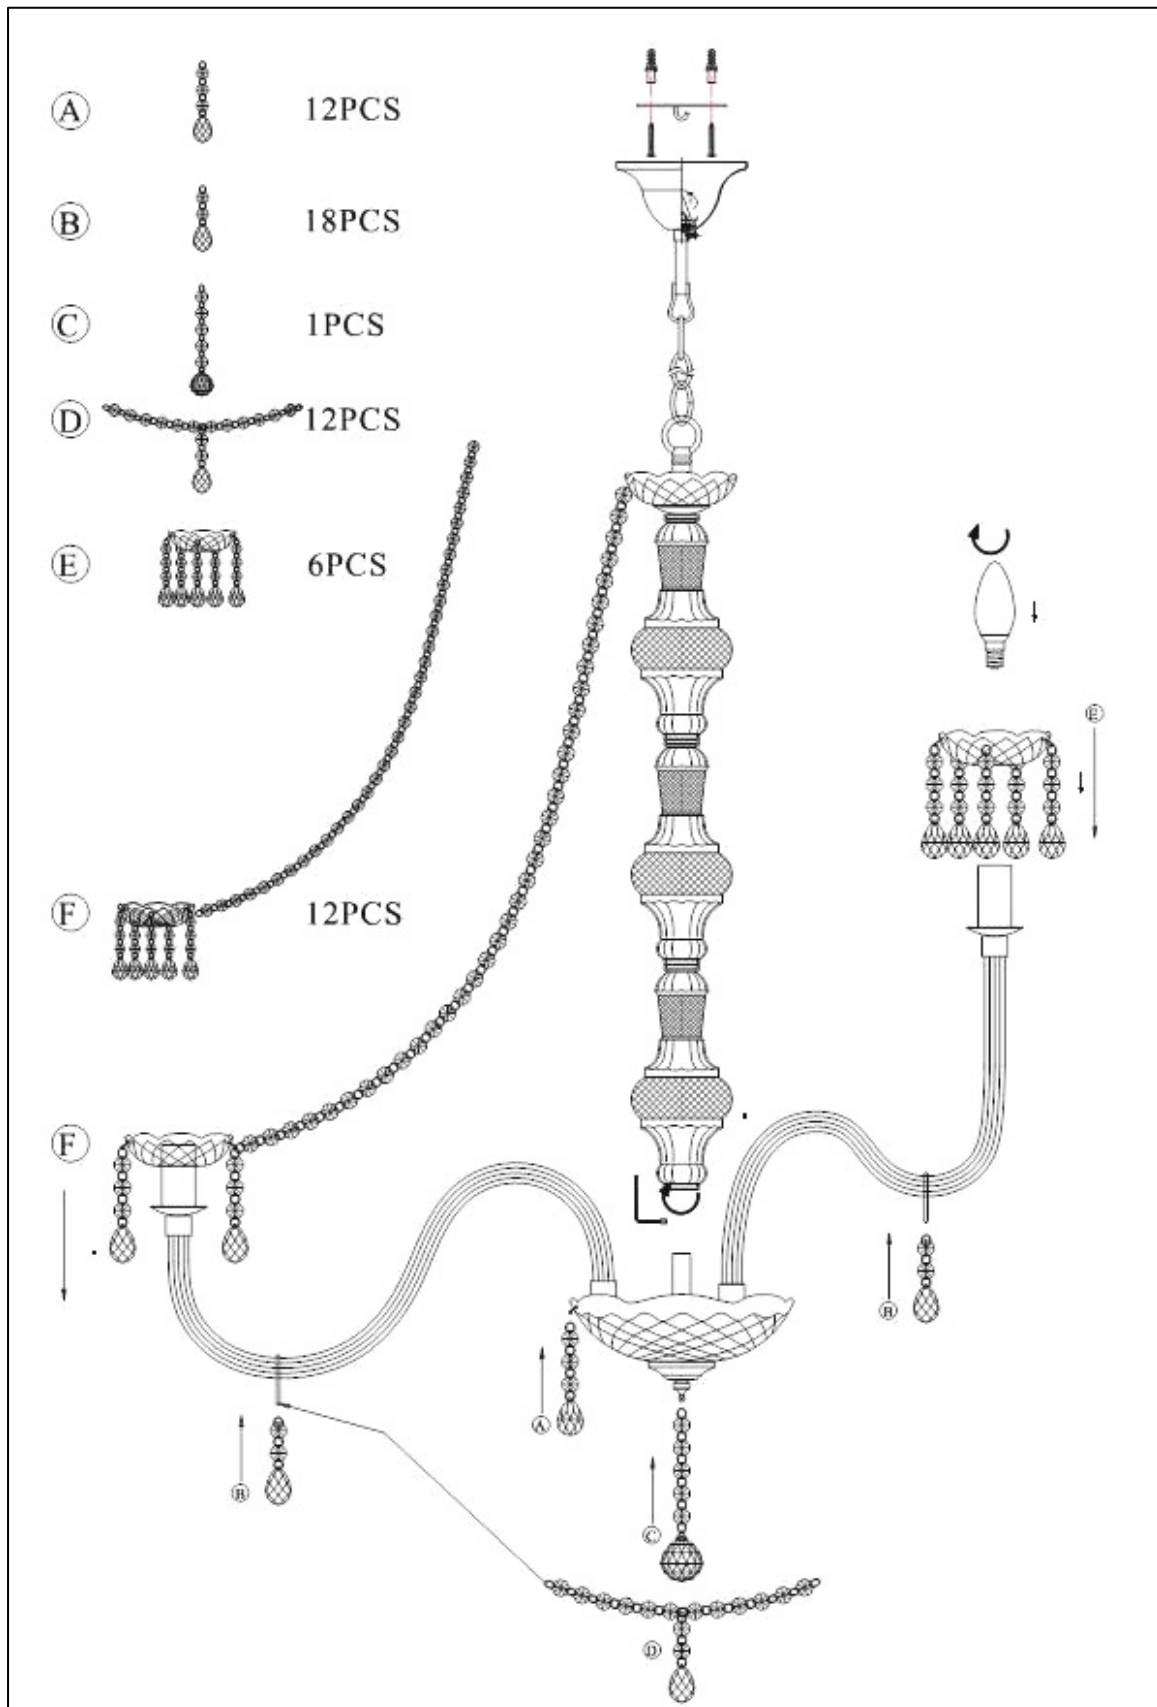

KATIE 18 LIGHT PENDANT