

ONEDIN PICTURE LIGHT INSTALLATION INSTRUCTIONS

These instructions are provided for your safety.

Please read carefully before commencing work and retain for future reference.

SAFETY INFORMATION


- * If you are in any doubt consult a person competent to give advice on the installation of electrical equipment.
- * This fitting should be fitted in accordance with current IEE Wiring Regulations and Building Regulations.
- * To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electricity supply without your knowledge.
- * To avoid damage to concealed wiring during installation, establish the direction of the supply cable before drilling fixing holes.
- * This fitting is Class I = \perp and should be fitted to a lighting supply (with earth) protected by a 5 Amp fuse or equivalent circuit breaker.
- * Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Never exceed the wattage stated.
- * When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.

INSTALLATION

1. Ensure the house electricity supply is off at the fuse board.
2. Before removing the existing fitting, carefully note the position of each set of cables. If there are loop in cables that are not connected to the light these must be terminated in a separate terminal block not connected to the fitting.

3. Remove the mounting bracket from fitting by undoing the two retaining screws.
4. Using the mounting bracket as template, mark and drill fixing holes in the wall. Ensure the holes are drilled into a solid wall or other suitable mounting and not just into plaster.


5. The weight of the fitting must be supported whilst making the electrical connections as follows:

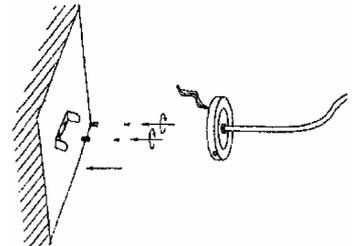

Connect supply live (normally brown or red) to fitting live (marked "L") on the terminal block.
Connect supply neutral (normally blue or black) to fitting neutral (marked "N") on the terminal block.
Connect supply earth (normally green/yellow or unsheathed) to earth (marked " \perp ") on terminal block.

Ensure electrical connections are tight and no loose strands of wire are left out of the terminal block.

6. Offer fitting up to the mounting bracket and align fixing holes. Ensure switch is positioned at the bottom of the fitting. Secure in place with the retaining screws removed earlier. **Take care not to damage wiring.**
7. Fit the bulbs, type and wattage as indicated on the wall light. **The wattage indicated must not be exceeded.**
8. Fit the bulb: Type and wattage as indicated on the fitting. **The wattage indicated must not be exceeded.**
9. **The head must be adjusted so it is no closer than 20cm from the illuminated surface.** Adjust the angle of the reflector tube to the desired position whilst observing the above restriction.
10. Switch on the electricity supply at the fuse board.

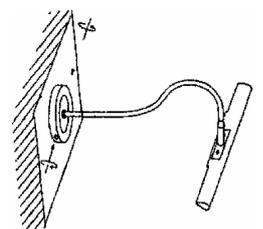

GENERAL INFORMATION

This fitting is designed for internal use only and must be fitted to a DRY SURFACE as any dampness in plaster or paint can damage the finish. **Do not use polish or abrasive cleaner - just a soft dry cloth.**